


SMARTFAB™ 125

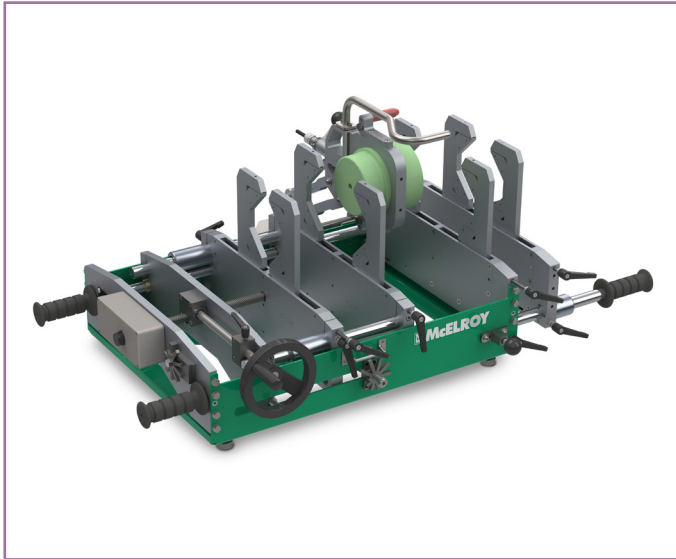

TECHNICAL SPECIFICATION:

Size range: 20mm - 125mm (1/2" - 4-1/2")

Piping & Materials: [See Welding Selection Chart](#)

Required Power: 120V/ 1Ph/ 15Amp

Dimensions: 54" x 36" x 31"

Shipping dimensions: 56" x 36" x 31"

Shipping Weight: 435 lbs.

FEATURES:

- Innovative inserts that reduce ovality in pipe and fittings
- Heater pivots 180° so the machine, pipe and fitting never has to be repositioned
- Jaws clamp individually and are size independent, allowing a greater combination of pipe and fittings
- Outer jaw spacing is adjustable – allowing greater flexibility, support and alignment while fusing fittings and assemblies
- Outer fixed jaw is removable for added clearance
- Positive stop at full stab depth to fabricate at exact dimensions
- Rack and pinion drive provides smooth, steady fusion force
- Drive handle positioned so that unit can operate on any flat surface

NOTES:

- Includes adapter storage box and shipping container
- Socket heater brushings must be ordered separately, available in DVS Type A or B, and IPS

ABOUT THE SMARTFAB™ 125:

The SmartFab™ 125 benchtop machine portable design allows it to be positioned on any flat surface for precise prefabrication, providing versatility in the shop as well as the field.

Advanced features of the SmartFab™ 125 provide more efficiency with innovative inserts that reduce ovality in pipe and fittings. The heater pivots to easily accommodate fittings situated on either side of the machine, which eliminates having to reposition the entire machine. Its four jaws adjust to any desired spacing and each jaw clamps individually to the desired pipe and fitting size.

TOOL PURCHASE PART NUMBER: 5711000MC

TOOL RENTAL PART NUMBER: 9711000MC

Powered by

