# SERIES 92 + 94 WITH PROTEK FAILSAFE BATTERY PACK

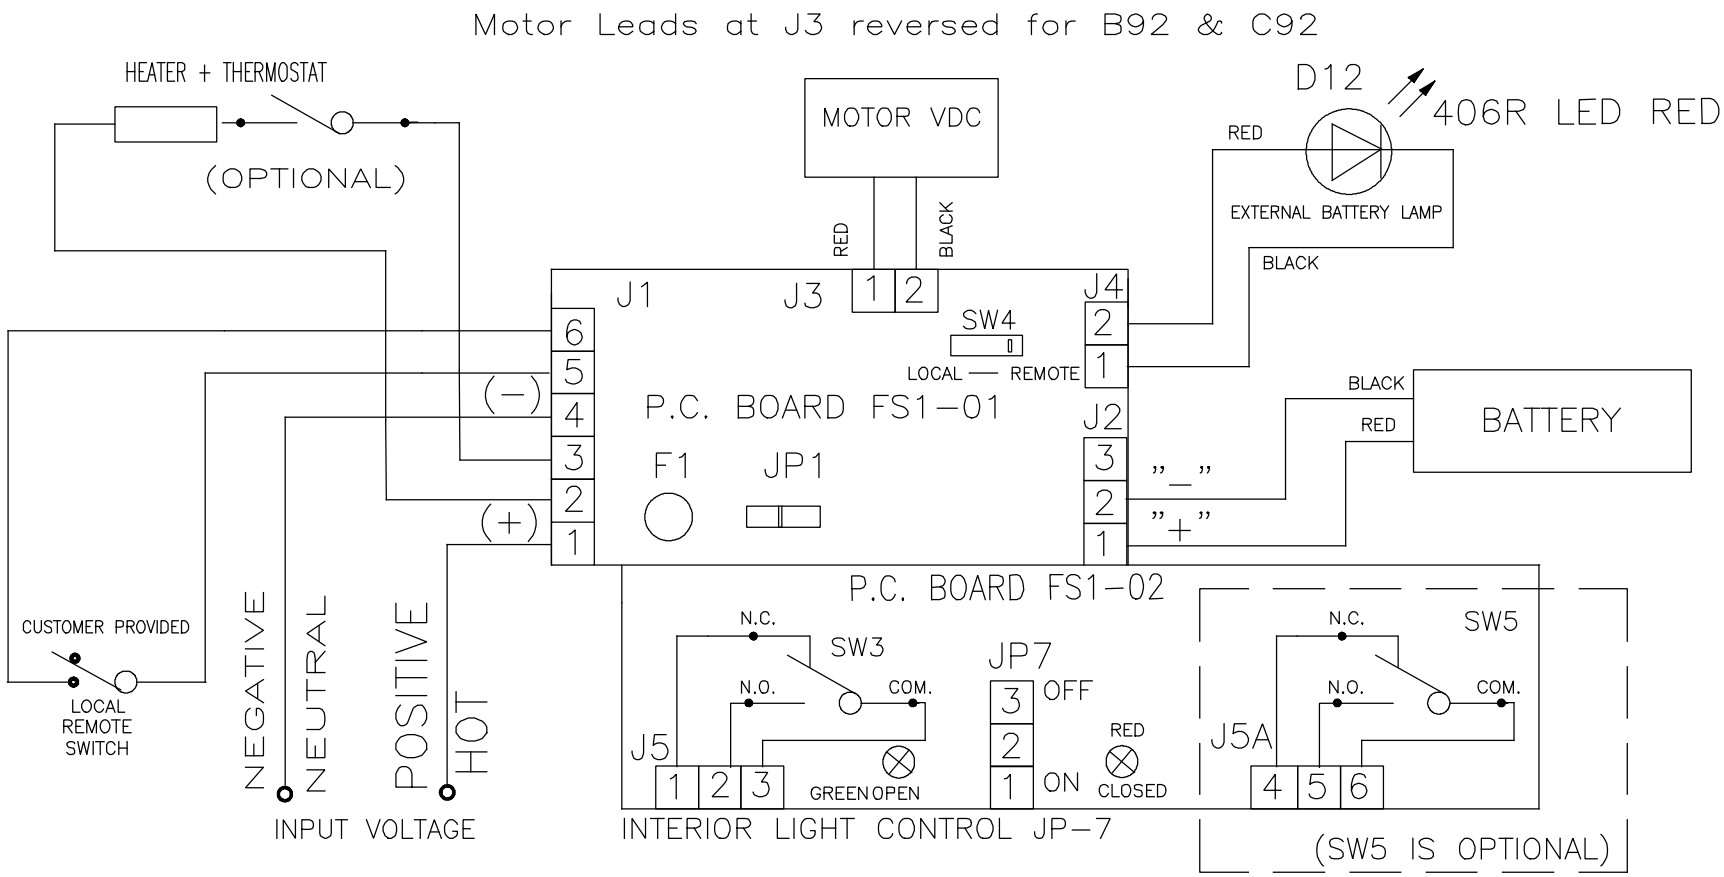


NOTES 1:

F1 - FUSE TR5 # 19373 FAST−ACTING

FOR 120VAC/220VAC − 2.0A

12VAC/12VDC − 3.0A

24VAC/24VDC − 4.0A

THIS DRAWING AND ALL INFORMATION HEREON IS THE PROPERTY OF ASAHI/AMERICA. ANY COPYING, REPRODUCTION OR UNAUTHORIZED USE IS FORBIDDEN WITHOUT WRITTEN CONSENT.

| | NAME | DATE |
|---|---|---|
| DR | KENICHI MIYAZAKI | 1/8/02 |
| APPD | DAVE HURLEY | 1/8/02 |
| PROD | LEO LESTER | 1/8/02 |
| WO#/CO# | | |
| FILE | | |

ASAHI/AMERICA
ISO 9001 CERTIFIED
35 GREEN STREET, P.O. BOX 653, MALDEN, MA.

FSI WIRING DIAGRAM
FAIL - SAFE

| SIZE | DWG. NO. | REV |
|---|---|---|
| A | 0029FS | B |

SCALE NTS SHEET 1 OF 1